


810K-MC



- power to lift



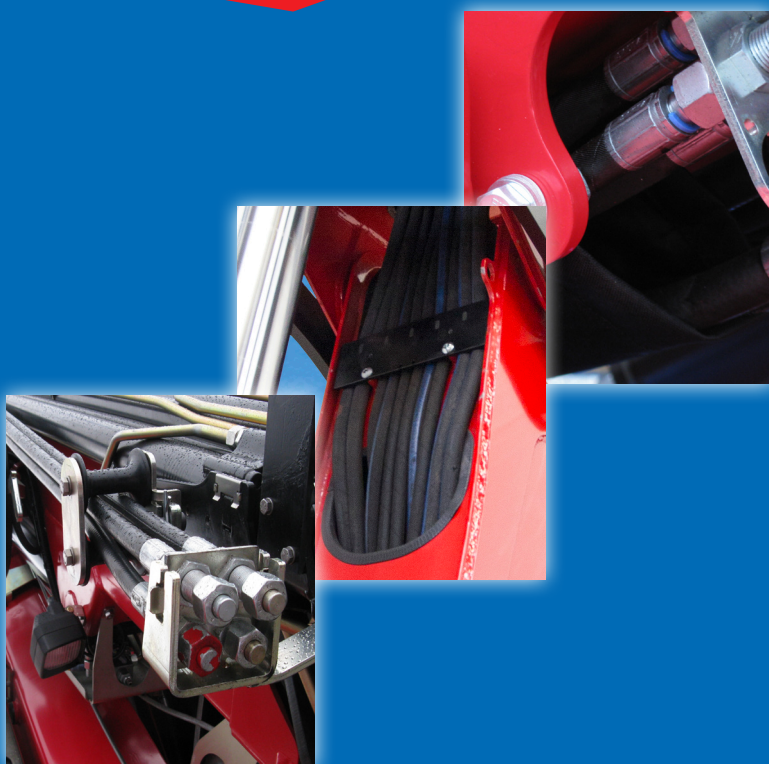

Loading group HC1/B3		810-K1	810-K2	810-K3	810-K4
Type		K-MC			
TECHNICAL DATA					
Load moment	tm	7.0	6.8	6.7	6.4
Hydraulic reach	m	5.3	7.3	9.1	11.0
Slewing torque	kgm			840	
Slewing angle	°			400	
Working pressure	bar			300	
Weight excl. stabilizer legs	kg	685	760	830	890
Weight of stabilizer legs, standard	kg			120	
Pump performance	l/min			35	
Oil capacity in tank fitted on crane	l			50	
Power consumption	kW			18	
GEOMETRY					
Height above mounting surface	mm	1910	1910	1910	1910
Width, folded	mm			2200	
Length of crane, no extra valves	mm			661	
Length with 2 extra valves in internal hose reel	mm			661	
Single Power Plus link arm system				Basic	
Over-bending on crane	°			15	
Hook height 1 m from column	m	2.76	2.67	2.58	2.5
CONTROL MODE					
Manual operation of crane (MC)				Basic	
Manual operation of stabilizer functions				Basic	
Dual control of crane and stabilizer functions				Basic	
CONTROLS					
RCL 5300 Safety System				Basic	
Control valve type (-h) for crane operation				Basic	
Control valve type (-h) for operation of stabilizer legs and beams				Basic	
Full working speed in the entire working area				Basic	
OPTIONS: HYDRAULIC EQUIPMENT					
High-pressure filter				Option	
Hydraulically extensible stabilizer beam				Option	
Quick-release couplings for extra valves				Option	
Extra valves in hose guides				Option	
Extra valves in hose reels internally in the jib extensions				Option	
Extra valves in external hose reels				Option	
2 available functions (not with hydraulically extensible stabilizer beam)				Option	
Biodegradable oil				Option	
Oil tank fitted on crane				Option	
OTHER EQUIPMENT		810-K1	810-K2	810-K3	810-K4
Number of manual extensions		1	1	1	1
EVS stability monitoring system for manually operated cranes				Option	
Work light on crane				Option	
Fixed stabilizer legs type V				Basic	
Manual swing-up stabilizer leg, type R 45°, 90°, 135°, 180°				Option	
Swing-up stabilizer leg, type GR 45°, 90°, 135°, 180° with gas spring				Option	
Box with stop button (ESD)				Basic	
Mechanical limitation of the slewing area 210°				Option	




HMF RCL 5300

The safety system monitors the load moment of the crane as well as the vehicle stability and thereby, the safety of the crane operator.




Single Link Arm System

The HMF single Power Plus link arm system has an excellent lifting capacity at long reach and works particularly fast when loading and unloading with grab.



Oil Regeneration System

A particular hydraulic valve on the hydraulic extensions of the crane optimises the speed of the extension system.



Excellent Power-to-Weight Ratio

Very low tare weight combined with high lifting capacity for high loading capacity and efficiency during loading and unloading.




MC - Manual Control

The crane is equipped with a manually operated control valve providing precise and simple control of the crane functions. The RCL 5300 TCL Safety System will only limit the load moment increasing movements if the crane reaches 100% capacity - all other functions remain fully operational.



Internal Hose Routing

Internal hose routing both through the column and stabilizer beams gives the crane an elegant design which also provides maximum protection for the hoses from wear, sunlight and other mechanical stress.

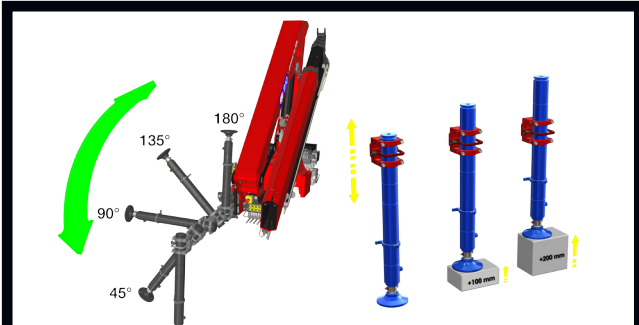

Adaptable Stabilizer Solutions

The crane's stabilizer legs are robust, easy to handle and require minimum space. You can choose between fixed stabilizer legs or manual swing-up stabilizer legs (45°, 90°, 135°, 180°) with or without gas spring. The stabilizer cylinder is adjustable by +/- 200 mm in height, with full stroke.



Corrosion and Wear and Tear

All painted surfaces are coated with EQC surface treatment, and all hydraulic pipes are finished with Zistaplex coating. All hydraulic components are coated with a zinc-nickel surface treatment to be able to pass the strict 720 hours salt spray test (EN/ISO 9227 standard), and all parts of stainless steel are corrosion-resistant.



- power to lift



810K1-MC

		▼	▼	▽
		1940	1310	940
kg		3,6	5,3	7,3
m				

810K2-MC

		▼	▼	▼	▽
		1845	1230	915	700
kg		3,7	5,4	7,3	9,1
m					

810K3-MC

		▼	▼	▼	▼	▽
		1760	1160	860	675	535
kg		3,8	5,5	7,2	9,1	11
m						

810K4-MC

		▼	▼	▼	▼	▼	▽
		1695	1105	805	625	515	300
kg		3,8	5,6	7,3	9,1	11	12,8
m							

▼ Lifting capacity without manual extensions
▽ Lifting capacity with manual extensions



- power to lift
HMF Group A/S

Oddervej 200 · DK-8270 Højbjerg
Tel.: +45 8627 0800 · info@hmf.dk

www.hmf.dk